



HDCF03E

Refrigerated drawers

CONSTRUCTION FEATURES

- Stainless steel AISI 304 construction
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Ergonomic and fully built-in drawers handle with magnetic closure
- Drawers with tray frame
- Static cooling through copper coils embedded in polyurethane foams
- Ecological type compressor unit (R404A)
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic temperature control
- Simplified, user-friendly controls
- Operating temperature +0°C/+5°C and -18°C/+5°C
- Condensate evaporation tray
- Adjustable feet
- Solid top for equipments support

STANDARD SUPPLY

- Polycarbonate gastronorm containers for each drawer

OPTIONS & ACCESSORIES

- ☐ 4 castors, 2 of which with brake

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



moduline



TECHNICAL INSTALLATION DIAGRAM

Chiller drawer

+3°C

Freezer drawer

-18°C

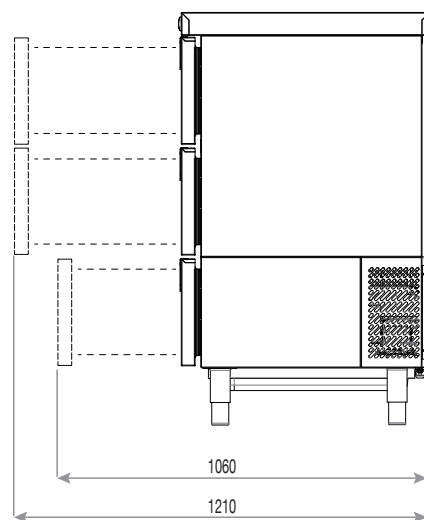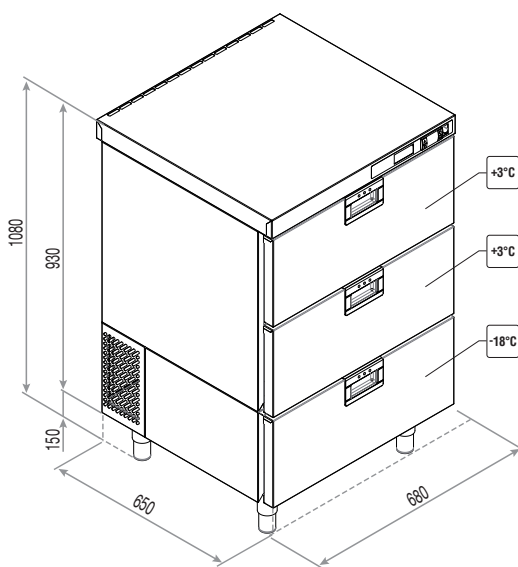

**Overall dimensions
(W x D x H) - mm**

680 x 650 x 1080

**Drawers capacity
+3°C (h=150)**

2 x GN 1/1 + 4 x GN 1/4

**Drawers capacity
-18°C (h=150)**


1 x GN 1/1

Power kW

0,42

Power supply

AC 230 V / 50 Hz

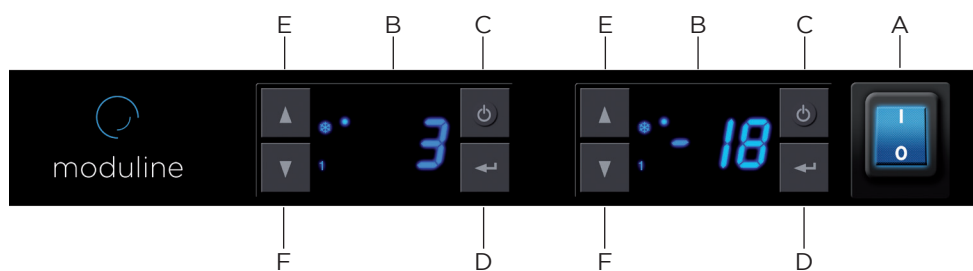

A ON/OFF switch

B Display

C Functions key

D Enter key

E Temperature increase key

F Temperature decrease key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it