



TBF122D

Blast chiller / freezer

CONSTRUCTION FEATURES

- Stainless steel 18/10 full construction
- Monobloc chamber with radiused corners
- Removable side racks
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Ergonomic and fully built-in door handle with magnetic closure
- Stainless steel feet
- Self-closing door with stop in open position at 100°
- Ecological and hermetic compressor unit (R404A)
- Evaporator fitted with high flow rate fan for maximum cooling efficiency
- Compressor protected by overload cut-out with automatic reset micro switch cuts out the evaporator fan and compressor when the door is opened
- Anti-condensation heating element below the magnetic gasket
- Copper condenser with aluminum pins at high thermal efficiency and protected against corrosion with non-toxic paint
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic temperature control with defrosting programme
- Simplified user-friendly control
- Chilling mode at +3°C with cycle selection HARD or SOFT
- Freezing mode at -18°C with cycle selection HARD or SOFT
- Chilling programs based on time or core probe
- Precooling function
- Staychill function for automatic temperature holding mode
- Defrosting function with door open
- Condensation drip tray

STANDARD SUPPLY

- Internal core probe with conical tip
- Removable tray racks

OPTIONS & ACCESSORIES

- USB port saving device HACCP
- Multiprobe
- Heated core probe
- Casters set, 2 of which with brake


MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it




moduline

TECHNICAL INSTALLATION DIAGRAM

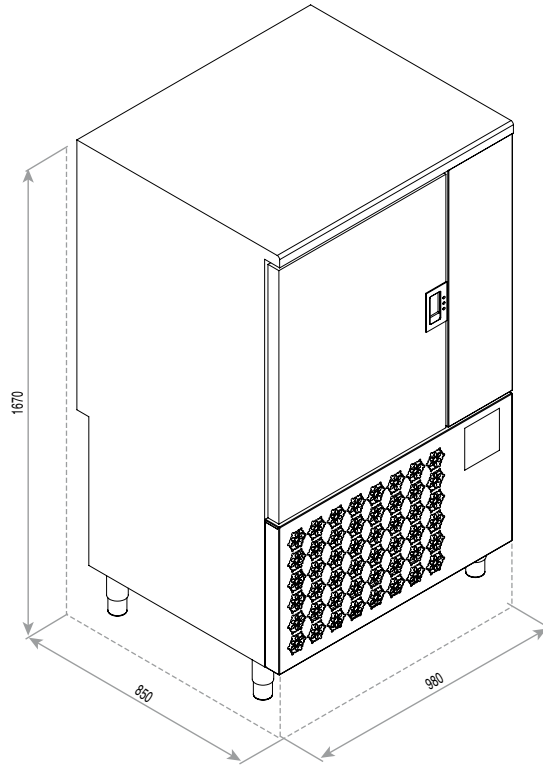

Overall dimensions (W x D x H) - mm	980 x 850 x 1670h
Trays capacity	8 (GN 2/1) h 65 12 (GN 2/1) h 40 16 (GN 2/1) h 20
Rated voltage [Vac]	400 Vac 3N 50 Hz
Total input [Kw]	6140
Cooling capacity [Kw]	8162
Working temperature [°C]	-40°C / +0°C
Cycle performance [kg]	72

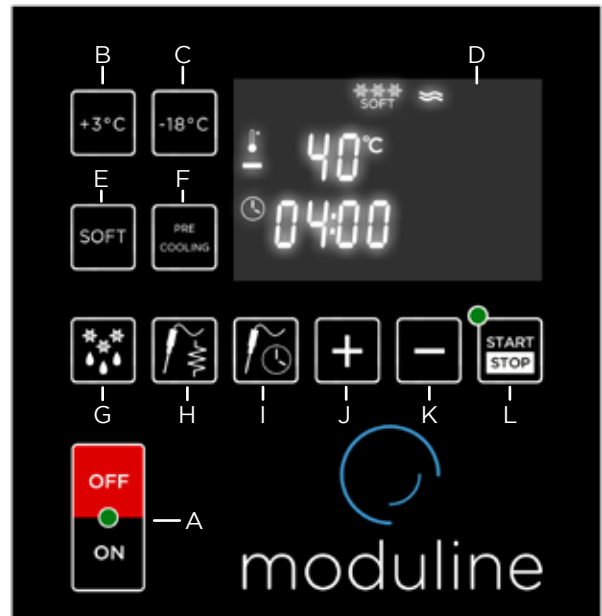

- | | |
|------------------------|----------------------|
| A ON/OFF switch | H Probe heating key |
| B Blast chilling key | I Time / probe key |
| C Freezing key | J Value increase key |
| D Display | K Value decrease key |
| E Soft cycle key | L START/STOP key |
| F Pre-cooling key | |
| G Defrost and back key | |

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it